



ENERGETIC
LIGHTING

Project:		Catalog #:		Type:	
----------	--	------------	--	-------	--

Prepared by:		Notes:		Date:	
--------------	--	--------	--	-------	--

E4DL

LED Commercial Downlight
Selectable CCT & Wattage
4", 6", 8", & 10" options • 10-yr Warranty



KEY FEATURES

- Ezcct field-selectable CCT for all models with - 3000K, 3500K & 4000K @ >90 CRI
- Ezwatt field-selectable Wattage - 3 steps (6", 8", and 10" profiles), varied by models (see stock ordering information)
- 4", 6", 8", and 10" profiles available for design flexibility
- Suitable for Type-IC on models: 4", 6", & 8"; note: 10" profile model is Type Non-IC only
- External spring arms install to mounting surface without the need for a traditional recessed can
- Integrated flexible metal conduit pigtail lead with snap-in 1/2" trade-size knockout adapter, 24" total length provided for flexible installation options
- Strong and reliable spring loaded capture mounting arms ensure flush installation as well as safety (mechanical safety cable also provided as precautionary in case of mounting surface failure)




Highlights




Field-selectable CCT and wattage control provides flexibility to installation and stocking




Universal spring clip arms allows direct mounting to surface without need for recessed can housing



Flexible metal conduit lead with 1/2" trade-size knockout adapter; safety cable also provided



Stepped baffle trim for optical diffusion and modern aesthetic design




Optional Rough-in plates available in 4", 6", 8", or 9" downlight diameters (see next page for more details)

Load Information


Input Voltage	120-347Vac	
Power Factor	0.90	
THD	<20%	
Low Temp Start	-25°C (-13°F)	
Max Temp	45°C (113°F)	
Unit Weight	4" profile	TBA LBS
	6" profile	TBA LBS
	8" profile	TBA LBS
	10" profile	TBA LBS

Dimensions


4" Profile

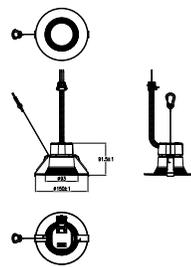


6" Profile

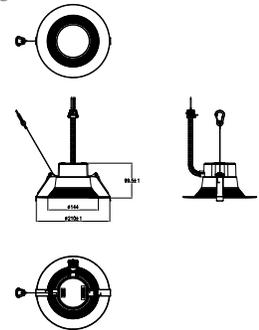

8" Profile

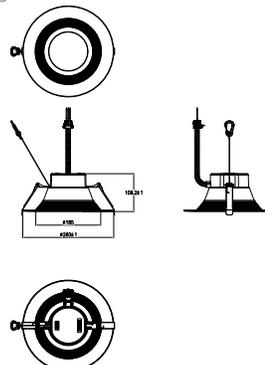

10" Profile

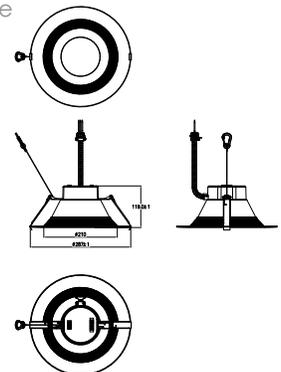

Shipping Information

Item	Weight	Box Qty.
4" profile	TBA lbs	6 per
6" profile	TBA lbs	6 per
8" profile	TBA lbs	6 per
10" profile	TBA lbs	6 per

STOCK ORDERING INFORMATION

4" Profile

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temp	CRI	Voltage	Dimming	Energy Star	Pallet Qty
E4DL4M9E93040-DF	50088	900 LM	12	75	3000K, 3500K, 4000K selectable	90	120-347	0-10v	Energy Star	TBA

6" Profile

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temp	CRI	Voltage	Dimming	Energy Star	Pallet Qty
E4DL6M14E93040-DS	50089	800, 1000, 1400 (LM) Selectable	10W, 12W, 17W selectable	80	3000K, 3500K, 4000K selectable	90	120-347	0-10v	Energy Star	TBA

8" Profile

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temp	CRI	Voltage	Dimming	Energy Star	Pallet Qty
E4DL8M17E93040-DS	50090	1200, 1450, 1700 (LM) Selectable	14W, 17W, 20W selectable	85	3000K, 3500K, 4000K selectable	90	120-347	0-10v	Energy Star	TBA


10" Profile

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temp	CRI	Voltage	Dimming	Energy Star	Pallet Qty
E4DL10M31E93040-DS	50091	2300, 2700, 3100 (LM) Selectable	30W, 35W, 40W selectable	78	3000K, 3500K, 4000K selectable	90	120-347	0-10v	Energy Star	TBA

Optional Accessories


E1RIP-4

Rough-in plate for 4" downlights

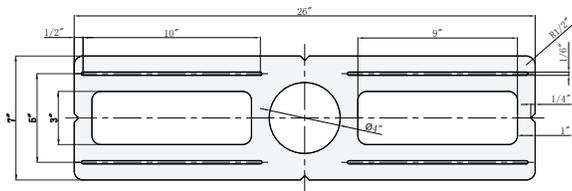


E1RIP-8

Rough-in plate for 8" downlights

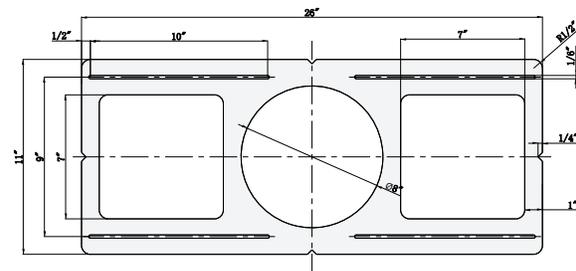


E1RIP-6

Rough-in plate for 6" downlights

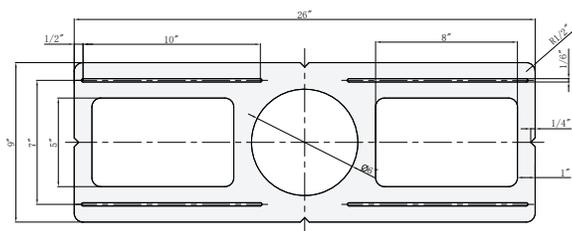

E1RIP-10

Rough-in plate for 10" downlights

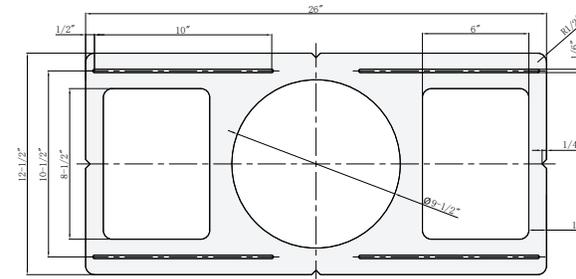



ENERGETIC
L I G H T I N G

E4DL

CCT&W-Select LED Commercial Downlight
50,000 System Lifetime • 5-yr Warranty

NOTES: