

Project:	Catalog #:	Type:
Prepared by:	Notes:	Date:

E5DL-G

LED Downlight with Nightlight Feature
Selectable CCT
6" diameter •5-yr Warranty

KEY FEATURES

- EZCCT field-selectable CCT for all models with - 2700K, 3000K, 4000K, 5000K & 6500K @ >90 CRI
- By toggling on/off the downlight will transition to a nightlight mode where a ring of light around the perimeter will provide 30 lumen light output
- Ultra-thin profile at only 0.75 inch
- Install as surface-mounted over jbox or as recessed can retrofit compatible with 5" & 6" diameter cans




Nightlight Feature




Highlights



CCT color-selection switch located on back, choose among 2700K, 3000K, 4000K, 5000K, or 6500K



Ultra thin profile, measuring just a little under an inch



Compatible with 5&6-inch recessed cans or direct J-box mounting



Installation in either a junction box or retrofit into a recessed can using the provided E26 adapter

Load Information

Input Voltage	120Vac
Power Factor	0.9
THD	20%
Low Temp Start	-20°C (-4°F)
Max Temp	45°C (113°F)
Unit Weight	0.96 lbs

Shipping Information

Item	Weight	Box Qty.	Case Qty.
E5DL6-92765-L80G	1.13 lbs	1 per	24 per


Case Weight 28.85 lbs

L70 Lifetime

Ambient Temp	TM-21 Lumen Maint. (50,000 hours)	Theoretical L70 (hours)
25°C	>70%	50,000

Dimensions

D	H1	H2
7.63 in	0.75 in	1.25 in

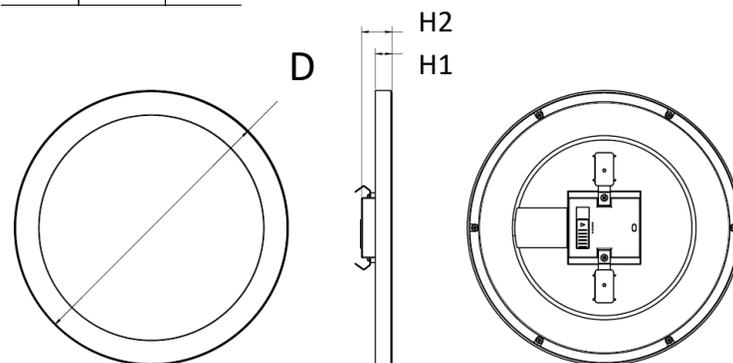

STOCK ORDERING INFORMATION

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temperature	CRI	Voltage	Dimming	Certifications	Pallet Qty
E5DL6-92765-L80G	50105	800 + 30 lm	12 + 3 W	72	2700K, 3000K, 4000K, 5000K, 6500K selectable	90	120V ac	Triac	ETL, Energy Star	TBA



ENERGETIC
L I G H T I N G

E5DL-G

CCT-Select LED Downlight with Nightlight
50,000 System Lifetime • 5-yr Warranty

NOTES: